


Callisto UCM web configuration

Admin account parameters


1. Type `http://callisto` into the address bar of a regular web browser to access Callisto from a client PC (see [Requirements – User side](#))
2. Type username `admin` and password `admin` for the first logon.

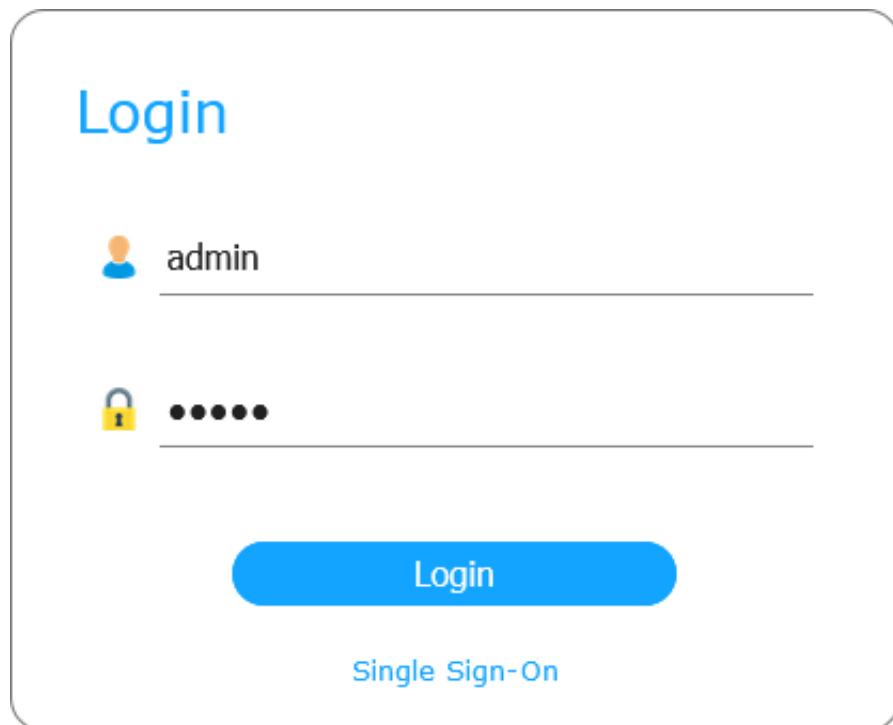

The screenshot shows a web login page with the following elements:

- The word "Login" in blue text at the top left.
- A username input field with a person icon on the left, containing the text "admin".
- A password input field with a lock icon on the left, containing six black dots.
- A blue rounded rectangular button labeled "Login" centered below the input fields.
- The text "Single Sign-On" in blue text centered below the button.

The following menu appears.

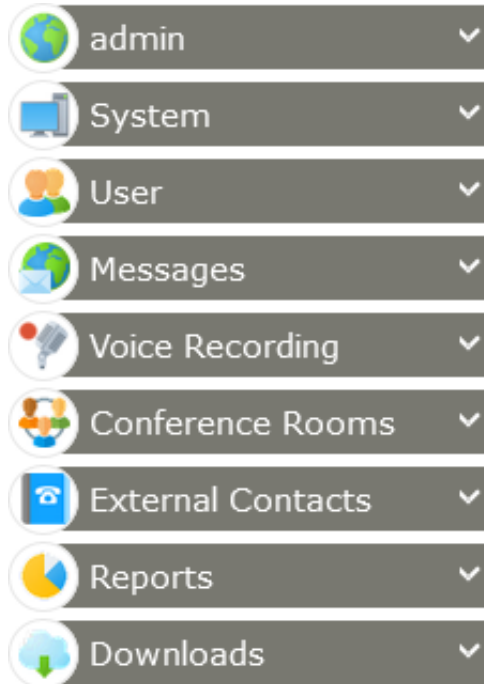

3. On the menu, choose Admin > Account to change the Username and Password. Supply the required data and select the preferred language.

A screenshot of the 'admin' account configuration page. The page title is 'admin' with a user icon. The form contains fields for Username (admin), Password (masked), Department, Last Name (Administrator), E-Mail (admin@company.com), Number, Authentication (Local), Confirm Pwd (masked), First Name, Language (English), and Mobile. There are 'Save' and 'Cancel' buttons at the bottom right.

Save the new settings.

System parameters

System Parameters

General

Callisto IP Address: [IP Configuration...](#) [TLS Configuration...](#) [Date and time...](#) [Hostname...](#)

System language: Company:

External URL:

Unified Communications Manager

IP Address: Version: Extension Mobility

Failover IP: Fax-Gateway IP:

Main AXL Node: Failover AXL Node:

Username: Password:

Security

Phone authentication

Username: Password:

Miscellaneous

VoIP: [SNMP...](#)

Force HTTPS Telnet enabled [Firewall...](#)

Syslog Server

Transport: IP Address: Port:

Messages

VoiceMail Number: Delete old messages after days

External prefix: Internal number length:

Internal prefix:

Audio Format: Fax Format:

MWI On Number: MWI Off Number: ?

E-Mail & SMS


[E-Mail settings...](#) SMS Provider: [Settings...](#)

Alarm messages

E-Mail: Exceeding the number of simultaneous calls:

Save

Cancel

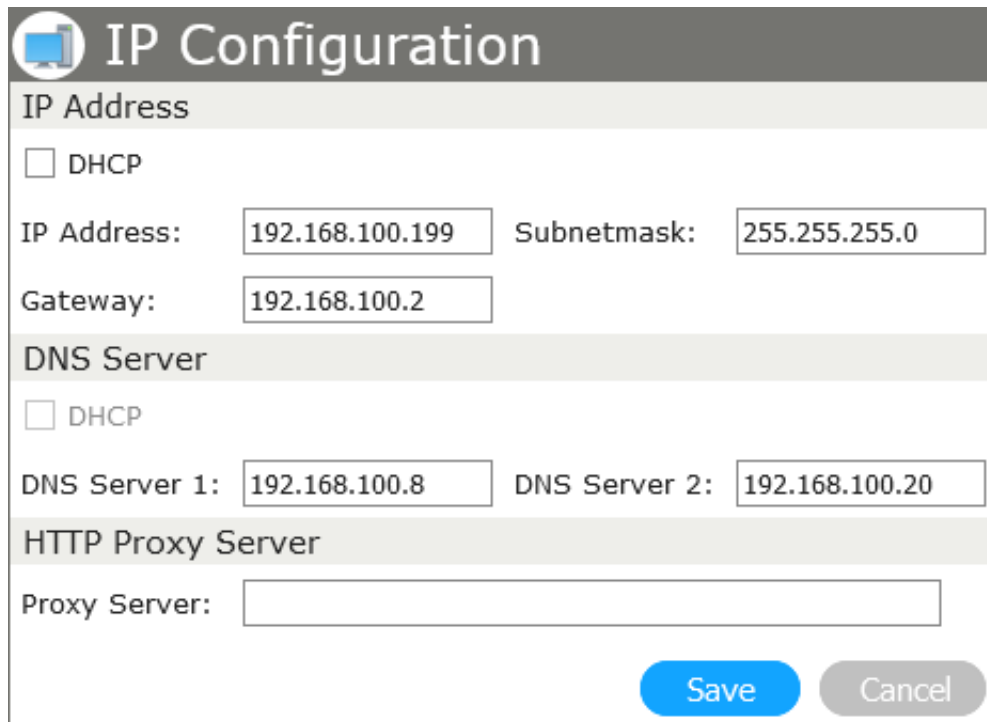

On the System menu, click System Parameters and enter the relevant system parameters:

For static IP address configuration parameters, click IP Configuration. After assigning a new IP address, reboot Callisto.

An IP Address for the Cisco Unified Communications Manager

A Username for the Cisco Unified Communications Manager administrator

A Password for the Cisco Unified Communications Manager administrator

The Gateway IP Address (for fax termination)

A Subnet mask

The System Language (system generic language that is used when external users call Callisto without first logging on)

A Voice Mail Number and the number of days the old messages are stored (0 = no deletion)

An External Prefix (the prefix required to be entered by users to facilitate external calls during normal operation)

The MWI On and MWI Off numbers that correspond to the MWI numbers configured on the Cisco Unified Communications Manager as described in the [Cisco UCM Configuration Manual](#) and the [Appendix](#).

- Selection of SMS Provider:
 - a. *aspsms.com*: Click Settings, then type Username and Password corresponding to an active aspsms.com account.
 - b. *E-Mail to SMS*: Enter a Receiver address (Please note: change expression SMSNumber to the target phone number), an Addressor address and the subject in Settings. For correct settings refer to the relevant provider. You can find a detailed description in the [Administration Manual](#).
- SMTP-Server and Addressor. Optionally, a Username and Password can be set for SMTP Auth (RFC 2821) authentication.

Save the new settings.

To listen to voice mail by phone, users call an internal voice mail number. For external access, an external number on the public telephone network must point to the internal number.

System > Cisco phones & services

On the System menu, click System and then Cisco Phones, and all IP phones connected to the system are listed. By clicking Reboot or Reboot all, the IP phones can be rebooted individually or simultaneously.

System Phones						
Import...		Search				
Name ^	Type	Description	Number	IP Address		
CSFAshok	Unified Client Services Framework	Ashok's Jabber phone	1043	172.26.1.11		Reboot
CSFJan	Unified Client Services Framework	Jan's Jabber phone	1035	192.168.100.160		Reboot
CSFJohn	Unified Client Services Framework	John's Jabber phone	1014	172.26.1.5		Reboot
SEP001122334459	Third-party SIP Device (Advanced)	SEP001122334459	1109	192.168.16.51		Reboot
SEP001122334460	Third-party SIP Device (Basic)	SEP001122334460	1108	172.26.1.21		Reboot
SEP001122334487	Third-party SIP Device (Advanced)	SEP001122334487	1107	172.26.1.32		Reboot
SEP00FFAE38E864	CIPC	Hans CIPC	1041	172.26.1.4		Reboot
SEP00FFEFF137B8	CIPC	Petar CIPC	1020	172.26.1.10		Reboot
SEP0800270AEDE1	CIPC	Hanako CIPC	1078	172.26.1.15		Reboot
SEP080027821B2B	CIPC	Juan CIPC	1024	172.26.1.17		Reboot
SEP10F311B60495	7926	Auto 1077	1077	192.168.0.100		Reboot
SEP2834A283DAB4	8861	Front desk phone	1072	192.168.105.25		Reboot
SEP500604721447	7945	Jane's phone	1012	192.168.100.105		Reboot
SEP5006047239BC	7945	Elisabeth's phone	1011	192.168.100.201		Reboot
SEP500604723B5A	7945	Taro's phone	1026	192.168.16.12		Reboot
SEP64A0E7F6BC2D	7975	Maria's phone	1053	192.168.100.164		Reboot
SEPF8A5C5B2380D	8861	SEPF8A5C5B2380D	1033	192.168.100.141		Reboot
TCTJP	Dual Mode for iPhone	Jabber iOS Jean-Pascal	1014	192.168.100.103		Reboot

System Phones: 18 / 18 Reboot all

Generating a complete list of all phones can sometimes take a long time.

Cisco services



Services button

Add custom services from the System menu by clicking Cisco Services; users can select these by pressing the *Services* button on their Cisco IP phone. Administrators can add custom services or services from third parties to this menu. For further details consult the Callisto Administration Manual.

Cisco Services

Upload file

Name	URL	All	Web	
LastRecording	Dial:9119	<input type="checkbox"/>	<input type="checkbox"/>	Save
ProfACD	http://192.168.100.199/Applications/Inbound/ProfACD2/src/Phone.asp?action=showMenu	<input type="checkbox"/>	<input type="checkbox"/>	Save
MA Group	http://192.168.100.199/Applications/Inbound/MA%20Group/src/PhoneMenu.asp?action=rootMenu&device=#DEVICENAME#	<input type="checkbox"/>	<input type="checkbox"/>	Save
User	http://192.168.100.199/Cisco/Directories.asp	<input type="checkbox"/>	<input type="checkbox"/>	Save

New Cisco Service:

+ Save

Music on hold

You can change the music that plays when a phone user is put on hold by uploading a custom .wav file to Callisto. To do so, navigate to Music on hold > Browse > Upload.

After uploading, select the file and click Activate.

Music on Hold

Filename ^	Size		
BritneySpears.wav	235 KB	Activate	
Cisco_Default.wav	485 KB	Activated	
RobbieWilliams.wav	235 KB	Activate	
Shakira.wav	237 KB	Activate	

Upload new audio file

No file selected.



Recycle icon


Files can be deleted by clicking the *recycle* icon.

The .wav files need to be of the following format: CCITT A-Law 8 kHz; 8 Bit; Mono.

Per default, a Cisco music file (*Cisco_default.wav*) is activated.

Callisto License

Standard Callisto appliances are normally delivered with four lines (*Callisto for UCM, HCS, Webex*) or two lines (*Callisto for UCME*) and excluding any options. To upgrade Callisto with additional features, enter a valid license key under System > Callisto License. Contact support@ctmodule.com for a new upgrade license key; the Callisto General Terms and Conditions (GTC) apply.

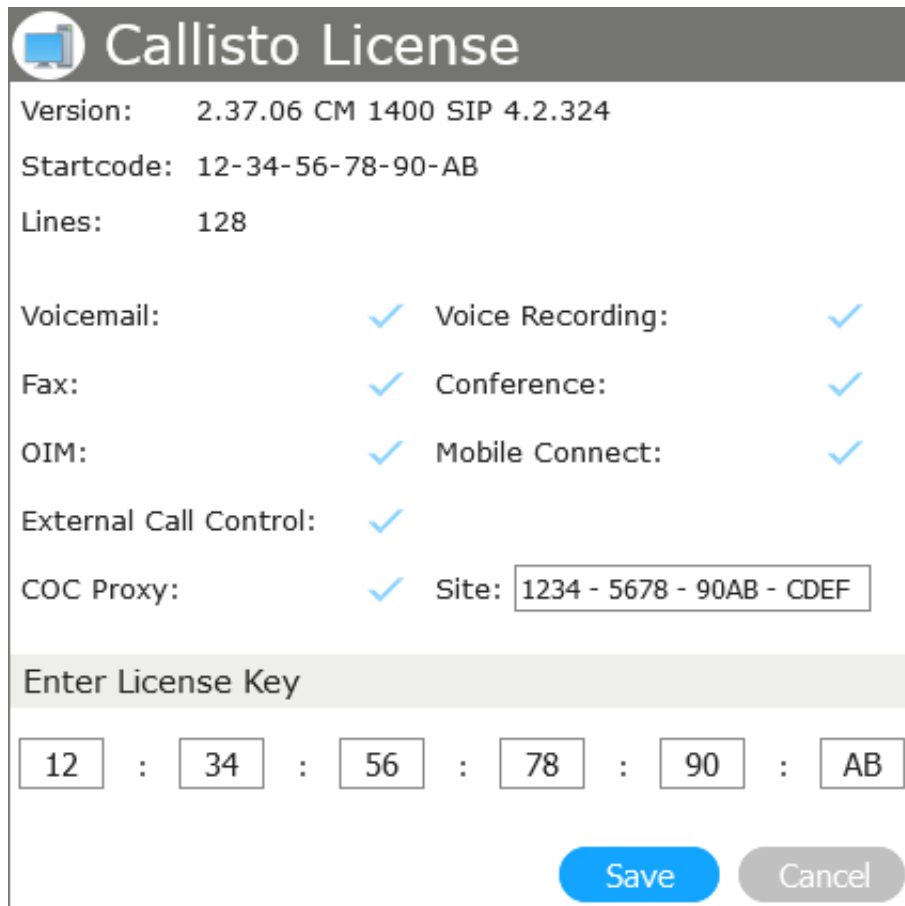

Callisto License

Version: 2.37.06 CM 1400 SIP 4.2.324

Startcode: 12-34-56-78-90-AB

Lines: 128

Voicemail: Voice Recording:

Fax: Conference:

OIM: Mobile Connect:

External Call Control:

COC Proxy: Site:


Enter License Key

: : : : :

The optional modules *Virtual Conference Room* and *Mobile Connect* are only available with the Callisto SIP version (Callisto UCM version 1.5x or higher).

Update System

You will find the most recent updates at www.ctmodule.com. Verify under Callisto License that the latest Callisto software version is installed. Upload an update (executable file) to Callisto UCM from the System menu by clicking System Menu > Install.

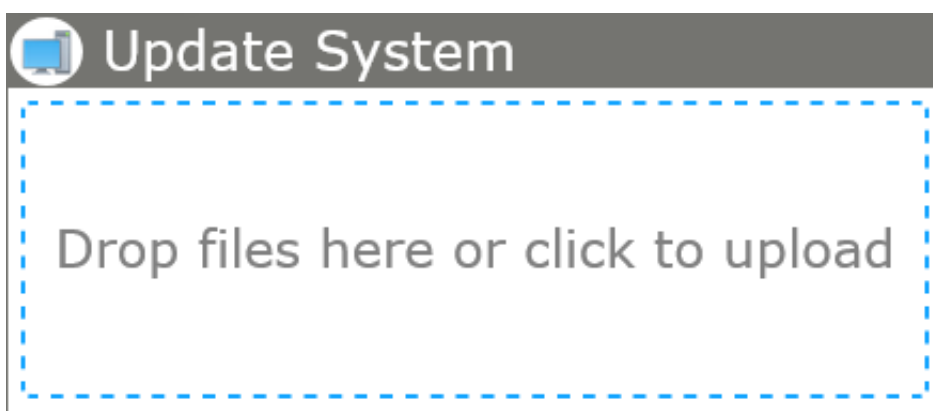



















Update System

Drop files here or click to upload

User

To add new users, go to User > New User, select the appropriate IP phone from the Phone list (all IP phones connected and active), enter all the other parameters and assign Privileges (for example, allow: SMS sending and notification, editing of the Global Directory, optional Fax sending, etc.)

-  admin 
-  System 
-  User 
 - Settings
 - New Administrator
 - New User
 - Userlist
 - User Groups
 - User Default Values
 - Import User
-  Messages 
-  Voice Recording 
-  Conference Rooms 
-  External Contacts 
-  Reports 
-  Downloads 

<New User>

Username:	<input type="text"/>	Authentication:	<input type="text" value="Local"/>
Password:	<input type="password"/>	Confirm Pwd:	<input type="password"/>
Department:	<input type="text"/>		
Last Name:	<input type="text"/>	First Name:	<input type="text"/>
VIP Status:	★★★★★		
E-Mail:	<input type="text"/>	Language:	<input type="text" value="English"/>
Mobile:	<input type="text"/>	Pager:	<input type="text"/>
Phone:	<input type="text"/>		
Number:	<input type="text"/>	<input checked="" type="checkbox"/> Show in local directory	
User PIN:	<input type="text"/>	<input type="checkbox"/> Always prompt	
User Groups:	<input type="text"/>		

Privileges

<input type="checkbox"/> Allow SMS sending	<input checked="" type="checkbox"/> Web access
<input type="checkbox"/> Allow Fax sending	<input type="checkbox"/> Edit global Directory
<input type="checkbox"/> Cisco Phone Message	<input type="checkbox"/> Allow Mobile Connect
<input type="checkbox"/> Access detailed Reports	<input checked="" type="checkbox"/> Change mobile number
<input type="checkbox"/> Edit Conference Rooms	<input checked="" type="checkbox"/> Change E-Mail address
<input type="checkbox"/> CTI Authentication	<input type="checkbox"/> Forward to external numbers
<input type="checkbox"/> REST Authentication	<input checked="" type="checkbox"/> Applications <input style="border: 1px solid #ccc; border-radius: 5px; padding: 2px 5px;" type="text" value="Choose..."/>
<input checked="" type="checkbox"/> Voice Recording <input style="border: 1px solid #ccc; border-radius: 5px; padding: 2px 5px;" type="text" value="Choose..."/>	

Group Permissions































Internal Contacts:	<input type="text"/>
External Contacts:	<input type="text"/>

Notification

Voicemail <ul style="list-style-type: none"> <input type="checkbox"/> Forward to E-Mail Account <input type="checkbox"/> Mark messages as read <input type="checkbox"/> Send SMS when receiving a message 	Fax <ul style="list-style-type: none"> <input type="checkbox"/> Forward to E-Mail Account <input type="checkbox"/> Mark messages as read <input type="checkbox"/> Send SMS when receiving a message <input type="checkbox"/> E-Mail notification for outbound Fax
---	--

Save the new settings.

Choose User > Edit User to access the user list. Here, new users can be verified, changed or deleted.

Userlist							
<input type="text" value="Search"/>							
Username ^	Last Name	First Name	Department	VIP Status	Phone	Mobile	
 ashok.kumar	Kumar	Ashok	Management	★★★★	1005 	+41790000000 	 
 elisabeth.mueller	Müller	Elisabeth	HR	★★	1009 	+41790000000 	 
 fred.bloggs	Bloggs	Fred	Management	★★★★★	1011 	+41790000000 	 
 gildong.hong	Hong	Gil-dong	R&D		1076 	+41790000000 	 
 hanako.sato	Sato	Hanako	Design	★★	1099 	+41790000000 	 
 hans.meier	Meier	Hans	Support		1054 	+41790000000 	 

Use the Search box to find any user or selection of users. For details on available search operators, refer to the [search operators quick reference](#).

All users from the Cisco Unified Communications Manager can be imported into Callisto UCM. Under User > User Import, verify that the system is operating correctly and then create a backup.

Should you encounter unexpected difficulties, check the Callisto FAQ, call your Callisto service and sales partner, or follow the instructions according to Callisto's General Terms and Conditions (GTC) and/or Service Level Agreement (SLA).