CUCM Configuration

The configuration for the corresponding Phone Service is done in the Communications Manager.

Paste the URL from the *Groups* tab into the Service URL input field in CUCM.

If a parameter is sent through the URL, ensure that it is not added to the *Parameters* section at the bottom of the configuration page.

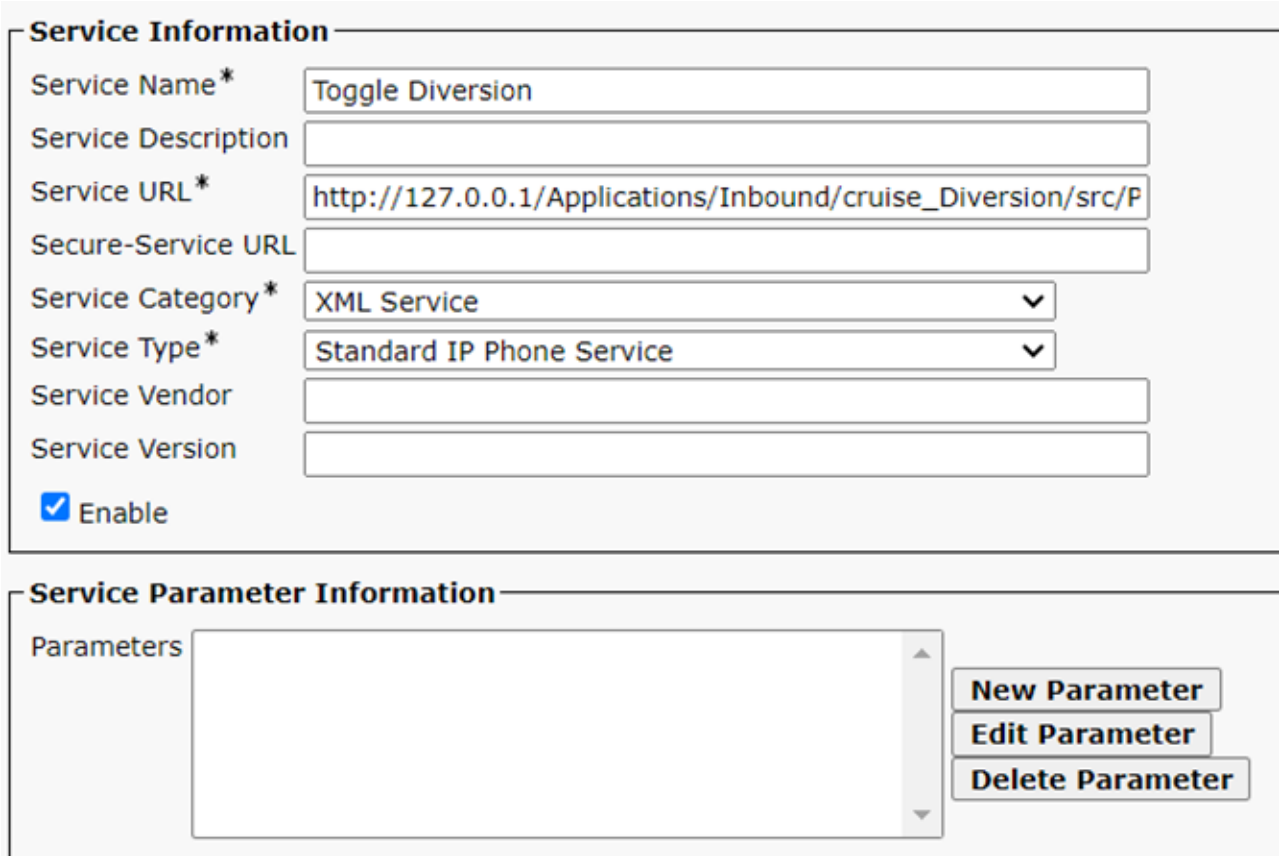

For more detailed instructions on configuring Cisco phone services, please refer to the Configuration of Cisco UCM manual.